




# LED STREET LIGHT


## CITYLITE-20B/30B/40B/60B

### Installation Manual





Type Number	LEDs	Power	Voltage	Frequency	CCT	Mounting height	kg
CITYLITE-20B	18	20W	AC100-277V	50/60Hz	3000/4000/6500	6~8m	7.0
CITYLITE-30B	24	30W	AC100-277V	50/60Hz	3000/4000/6500	6~8m	7.0
CITYLITE-40B	36	40W	AC100-277V	50/60Hz	3000/4000/6500	6~8m	7.0
CITYLITE-60B	54	60W	AC100-277V	50/60Hz	3000/4000/6500	6~8m	7.0

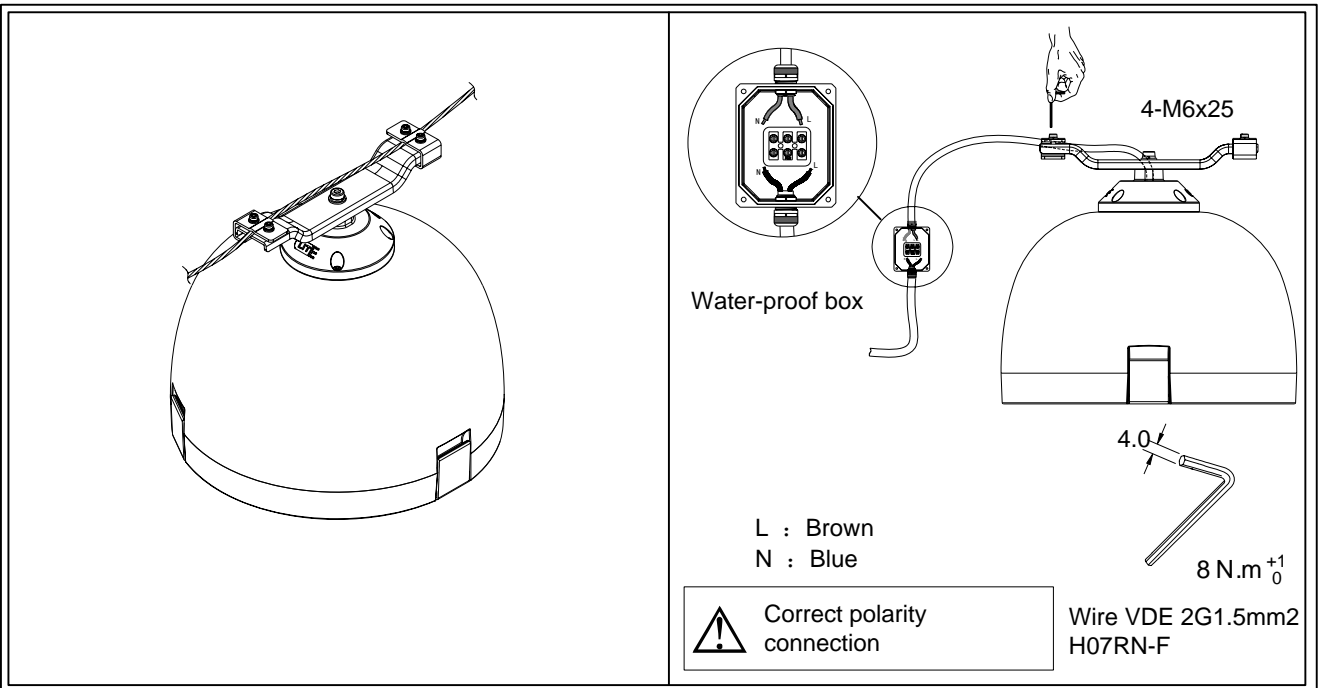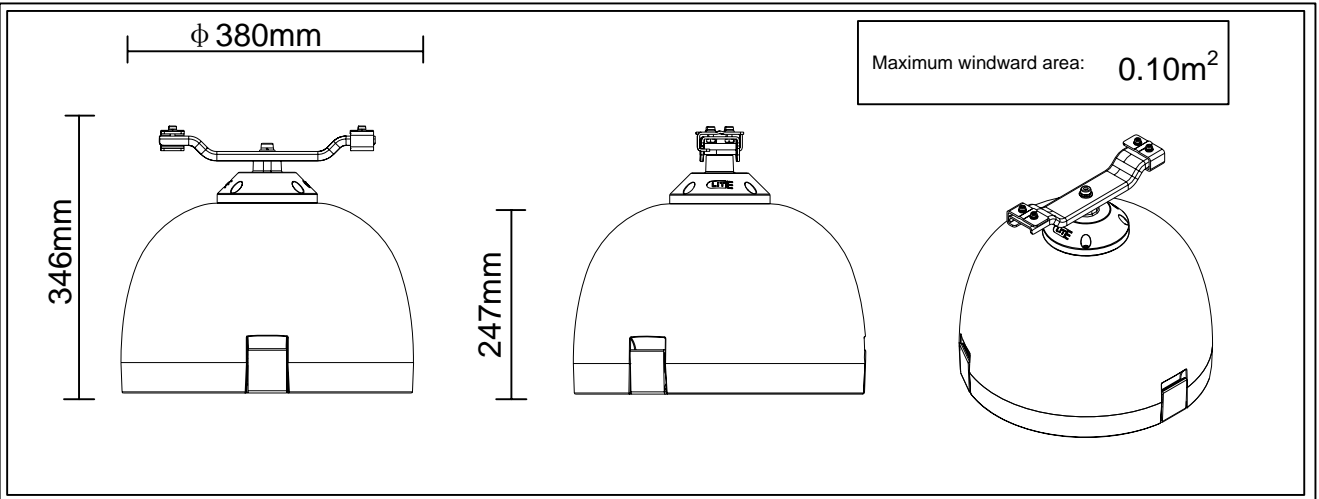

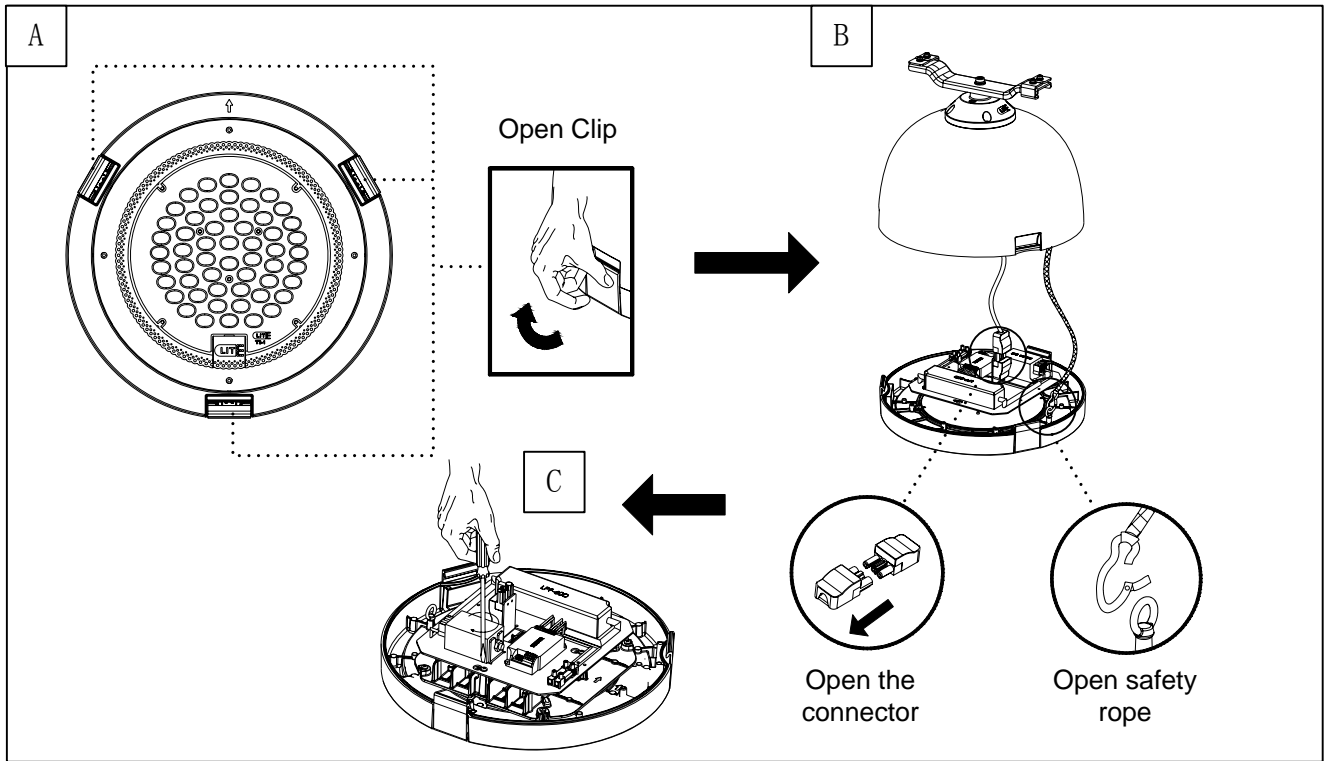

### Switching for power regulation

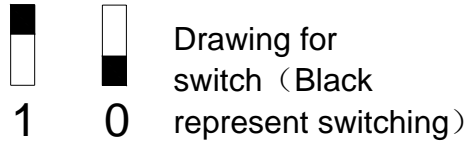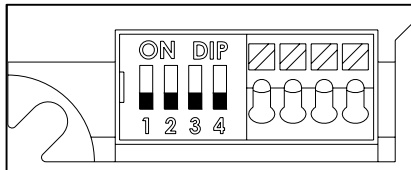

Rater Power	1	2	3	4	Rater Power	1	2	3	4
20W	0	0	0	0	42.5W	0	0	0	1
25W	1	0	0	0	45W	1	0	0	1
27.5W	0	1	0	0	47.5W	0	1	0	1
30W	1	1	0	0	50W	1	1	0	1
32.5W	0	0	1	0	52.5W	0	0	1	1
35W	1	0	1	0	55W	1	0	1	1
37.5W	0	1	1	0	57.5W	0	1	1	1
40W	1	1	1	0	60W	1	1	1	1

Noted : Be charged again after change the switch setting



1. The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEEE electrical regulations or the national requirements.
2. No supplied water-proof box, installation should be advised by qualified professional.
3. If the external cable of the lamp is damaged, please contact the supplier or professional for changing.
4. Do not switch on before complete installation.

When opening the fixture, please pay attention to the rubber ring sealing the fixture and bottom. If the ring is out of shape, it must be replaced with a new one. Misplacement of the rubber ring will invalidate the warranty.